


# PRODUCT SPECIFICATIONS

## GA-09 GRAB ATTACHMENT




The GA-09 Grab Attachment is designed to securely grab poles or pipes for safe transport by forklift about the worksite.

### Features:

- Suits poles and pipes ranging from 170mm to 900mm in outside diameter
- Slip-on base frame connects quickly and easily to a forklift
- Quick connect hydraulic coupling
- Supplied with fork locking pins to safely secure unit to a forklift
- Custom sizes available on request
- Enamel paint finish

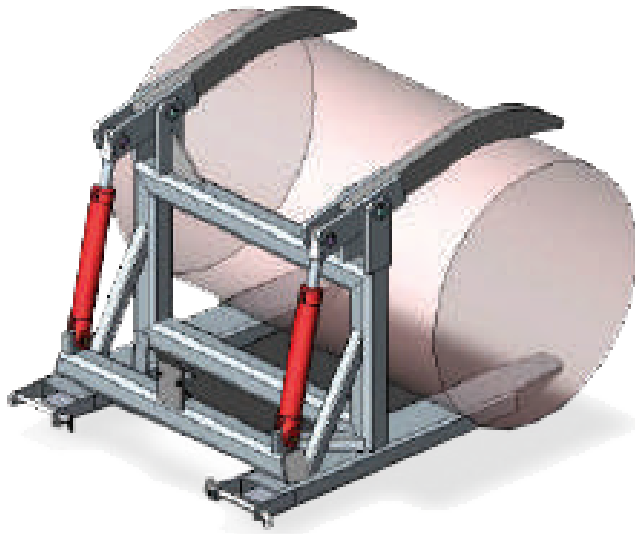


Working Load Limit (WLL)	2500kg
Load Centre	950mm
Minimum Pole Diameter	170mm
Maximum Pole Diameter	900mm
Unit Weight	265kg
Fork Pocket Size	165 x 60mm
Fork Pocket Centres	931mm
Horizontal C of G	420mm
Vertical C of G	300mm

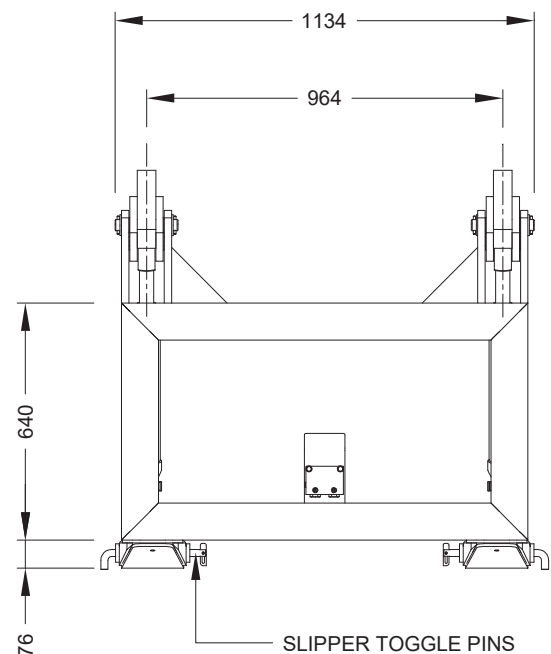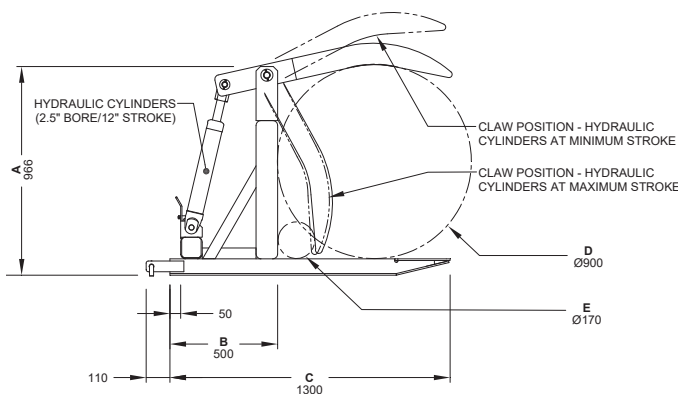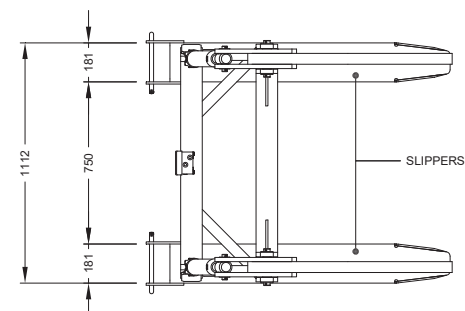

## PRODUCT SPECIFICATIONS

### GA-12 GRAB ATTACHMENT

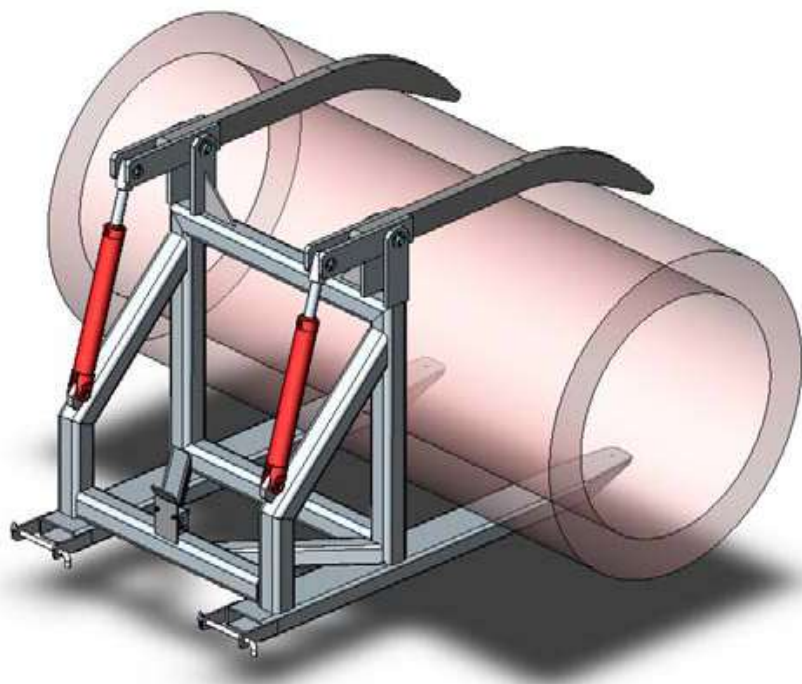

The type GA-12 Grab Attachment has been designed to grab and secure poles or pipes from 300mm to 1200mm in outside diameter and safely lift and transport these by Forklift about the worksite. This slip-on attachment can be fitted in seconds to a forklift requiring only the connection to the 3<sup>rd</sup> function hydraulics, via the quick connect hydraulic couplings, and the installation of two locking pins supplied to prevent the unit from moving off the fork arms.

The standard finish on this attachment is enamel painted over primed steel – colour: 'Safety Yellow'.

#### SPECIFICATIONS:

- Working Load Limit (WLL): 2500kg
- Unit Weight: 375kg
- Load Centre: 1300mm
- HCG: 580mm
- VCG: 455mm
- Pocket Size: 165 x 60mm
- Pocket Centres: 931mm
- Minimum Pole Diameter: 300mm
- Maximum Pole Diameter: 1200mm

