


Swivel Lifting Point

This item swivels 360° with 180° pivot function, the hoist ring and bail are manufactured from quenched and tempered, forged alloy steel. It is rated at 100% at 90° angle. 100% Magnaflux crack detection, 20,000 cycle fatigue tested. Applications: Machinery and various lifting and lashing applications

- Bolts are metric thread grade 10.9.
- Standard and long bolt type available.
- Test certificates supplied.

Applications: Machinery and various lifting and lashing applications

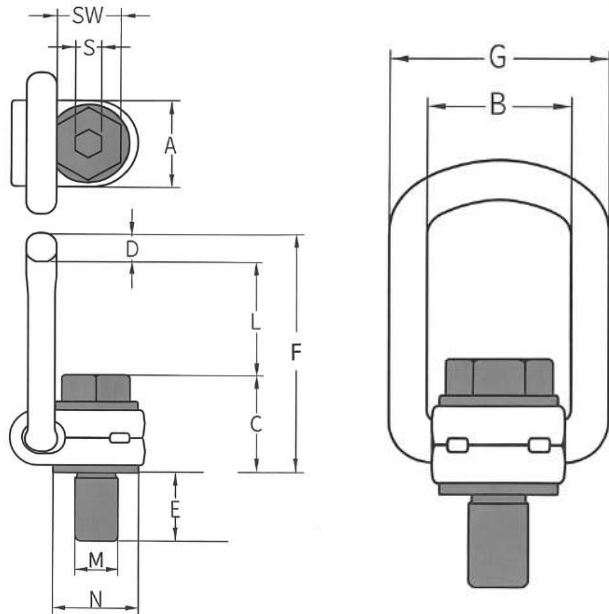

Part Number	Size	W.L.L Tonne	Weight (kg)	M	Dimensions in mm										
					E	A	B	C	D	F	G	L	N	S	SW
9958	M8	0.3	0.5	8x1.25	11	34	37	42	14	98.5	57	42.5	31	6	13
9960	M10	0.6	0.5	10x1.25	16	34	37	44	14	98.5	57	40.5	31	6	16
9962	M12	1	0.5	12x1.75	18	34	37	45	14	98.5	57	39.5	31	8	18
9964	M16	1.5	0.5	16x2.00	24	34	37	48	14	98.5	57	36.5	31	10	24
9966	M20	2.5	1.5	20x2.50	30	50	54	58	16.5	143	82	68.5	45	12	30
9968	M24	4	1.5	24x3.00	36	50	54	61	16.5	143	82	65.5	45	14	36
9970	M30	5	3.5	30x3.50	48	60	65	82	22	170	99	66	59	17	46
-	M36	7	3.5	36x4.00	54	60	65	85	22	170	99	63	59.5	22	55
-	M42	10	6.5	42x4.50	72	77	85	106	27	226.5	123	93.5	69	22	65