
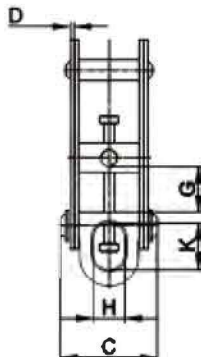


## UNIVERSAL BEAM GIRDER CLAMP

Universal Beam Girder Clamps are used to attach hoists into exposed structural beams commonly used in manufacturing, engineering, and warehousing operations. The base of a beam is designed to be caught in the clamps' jaws, acting as a stationary attachment point for lifting and suspending tools like chain hoists or lever hoists.

- Easily adjusted with threaded handle
- Fits a wide range of flange width and beams
- Suspension bar provides lower headroom
- Clamp jaw is designed to reduce flange stress by distributing load away from i-beam flange edge

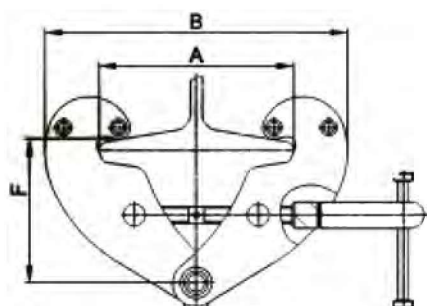

\*\*Please note colour and dimensions may vary depending on manufacturer\*\*

Product Code	Capacity (ton)	Flange width (mm)	Dimensions (mm)										N.W. (Kg)
			A	B		C	D	F		G	H	K	
			Max.	Max.	Min.			Max.	Min.				
10GC010	1	75-230	240	192	367	94	4	155	103	20	30	45	4.0
10GC020	2	75-230	240	192	367	102	6	155	103	20	30	45	4.8
10GC030	3	80-320	330	243	491	132	8	223	157	47	45	63	9.8
10GC050	5	80-320	330	243	491	142	10	223	157	47	45	63	11.1
10GC100	10	90-320	330	259	501	180	12	235	175	56	64	95	17.8

CONTACT US

 **1300 666 733**

The Lifting Equipment Experts since 1974.

[www.alllifting.com.au](http://www.alllifting.com.au) // [info@allliftng.com.au](mailto:info@allliftng.com.au)